

SCOT

MOTORPUMP™ — 2900 RPM

50 HERTZ, 3 X 3 X 6.5 FLG

56FB

JM

MOTOR DIMENSIONS


NEMA JM FRAME 3 PHASE 2900 RPM

| HP | Type | Frame | D | E | F | O | AB | BG | L | MH |
|--------|------|-------|------|------|------|-------|-------|-------|-------|------|
| 5.0 | ODP | JM184 | 4.50 | 3.75 | 2.25 | 8.56 | 6.70 | 6.25 | 6.15 | 0.41 |
| 7.5 | ODP | JM213 | 5.25 | 4.25 | 2.75 | 10.14 | 7.97 | 7.25 | 6.60 | 0.41 |
| 10 | ODP | JM215 | 5.25 | 4.25 | 3.50 | 10.14 | 7.97 | 8.00 | 6.64 | 0.41 |
| 15 | ODP | JM254 | 6.25 | 5.00 | 4.13 | 12.01 | 9.45 | 9.13 | 7.59 | 0.53 |
| 20 | ODP | JM256 | 6.25 | 5.00 | 5.00 | 12.01 | 9.45 | 10.00 | 6.72 | 0.53 |
| 5 | TEFC | JM184 | 4.50 | 3.75 | 2.25 | 9.34 | 7.57 | 5.00 | 7.76 | 0.41 |
| 7.5/10 | TEFC | JM215 | 5.25 | 4.25 | 3.50 | 10.37 | 8.19 | 6.77 | 9.16 | 0.41 |
| 15/20 | TEFC | JM256 | 6.25 | 5.00 | 5.00 | 12.76 | 10.48 | 9.01 | 11.70 | 0.53 |

Dimensions are the next larger 60Hz motor derated for 50HZ operation.

D056FBJM254

DRAWING DEPICTS JM254 20HP ODP MOTOR

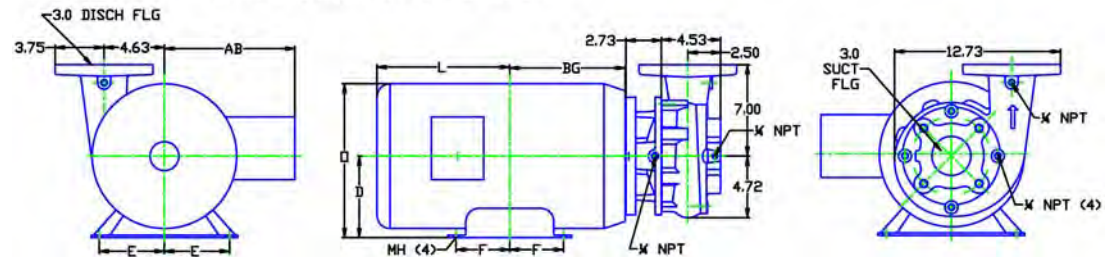

ALL DIMENSIONS IN INCHES

DRAWING REPRESENTS APPROXIMATE PUMP DIMENSIONS. AUTOCAD DRAWING TO SCALE AVAILABLE FROM FACTORY



055F5DP


D056FBJM254
0562900

56FB

JM

056FB2900JM
81.001.751

B20

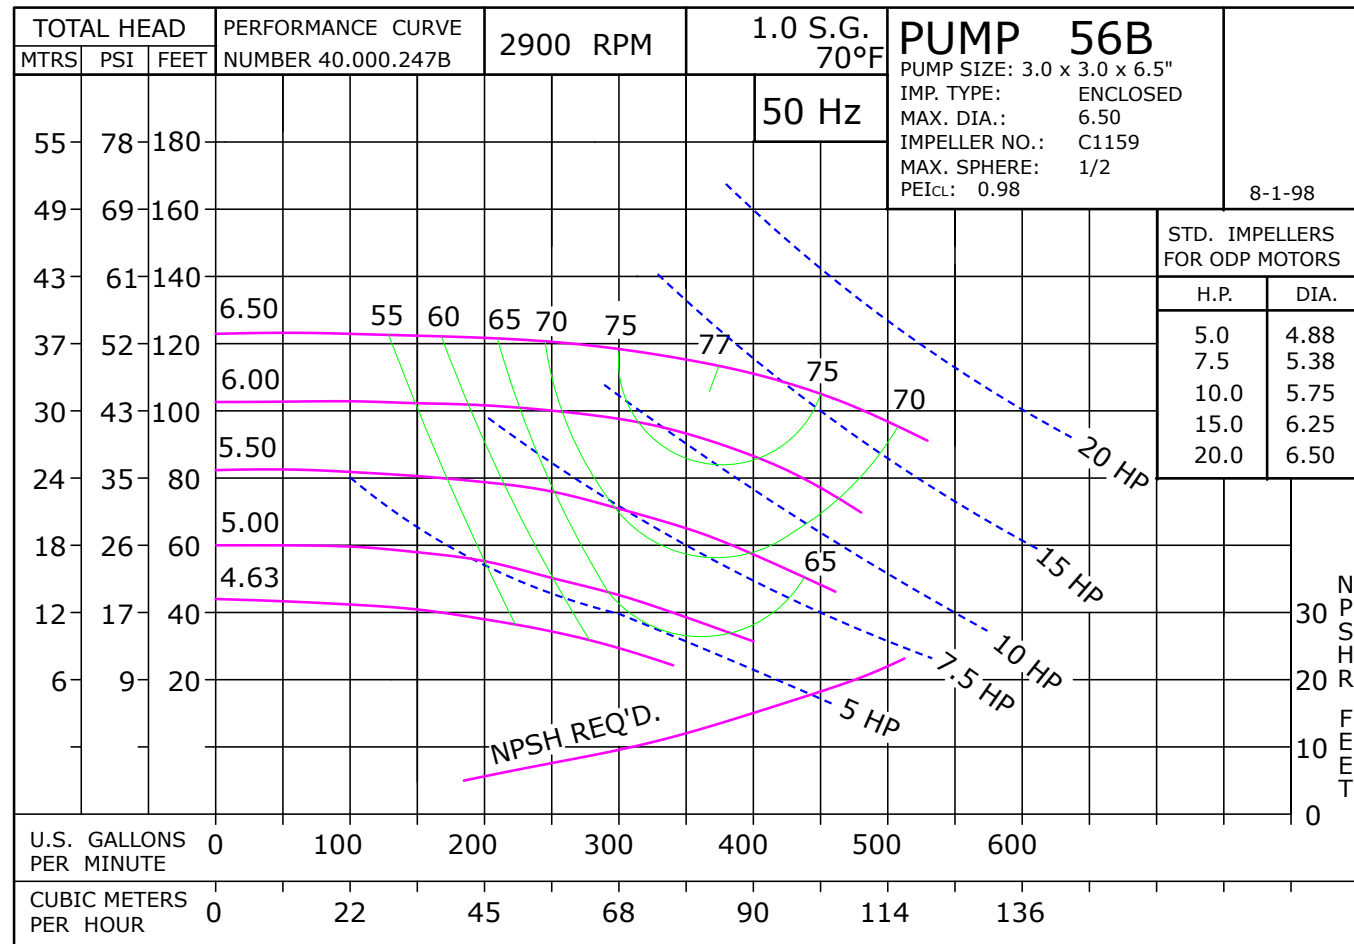

50 Hertz Pump & Motor Data

A 3-phase 50 Hertz Motorpump™ can be obtained in several ways. The most common options are listed below:

1. Most 60 Hz pumps available from Scot Pump can be operated on a 3-phase 50 Hz 190/380V power. However, when operated on 50 Hz power, the speed is reduced by approximately 20%, and a significant reduction in performance is realized. The charts below indicate these reductions in performance.
2. Pumps will produce the performance indicated in the performance curves when operated on 50 Hz power. The motors for these selections can be obtained through *derated 60 Hz motors* and *wound 50 Hz motors* (see below).

Contact factory for 1 Phase applications.

Derated 60 Hz Motors

The most common practice and readily available method of obtaining a 50 Hz motor is by using the next larger 60 Hz motor and derating it to the desired horsepower on 50 Hz. We will require the country the motor is being exported to, frequency in hertz and specific voltage to ensure that a nameplate with applicable efficiency and country markings (if required) is supplied. In utilizing this practice, service factors may be derated to 1.0. Please contact the factory for approval of the rating for your specific application.

Wound 50 Hz Motors

Specially wound 50 Hz motors are available. These motors are not normally a stock item and require an extended lead time.

The impeller and horsepower combination sized (taking the reduction in speed into consideration) may not be suitable for operation on 60 Hz power. The increase in speed, performance and load may overload the system and the electric motors. **Pumps sized for 50 Hz operation SHOULD NOT be tested on 60 Hz.**


| 60 Hz Pump on 50 Hz Power | | |
|---------------------------|--------|--------|
| No Impeller Change | | |
| 50 Hz | 60 Hz | Factor |
| GPM = | GPM x | 0.829 |
| Head = | Head x | 0.687 |
| BHP = | HP x | 0.569 |

| To Size 60 Hz Pump Using 50 Hz Data, | | |
|--------------------------------------|--------|--|
| Obtain 60 Hz Data As Follows: | | |
| 60 Hz | 50 Hz | Factor |
| GPM = | GPM x | 1.2 |
| Head = | Head x | 1.45 |
| BHP = | HP = | $\frac{\text{GPM} \times \text{Head} \times \text{SG of}}{3960 \times \text{Eff}}$ |

| Change of Speed (RPM) | | |
|-----------------------|-------------|--|
| | How Varies: | Examples |
| GPM | Directly | Double RPM = (2)(RPM) = (2)(GPM) Triple RPM = (3)(RPM) = (3)(GPM) |
| Head | Square | Double RPM = (2)(RPM) = (2) ² = (2)(2) = (4)(Head) Triple RPM = (3)(RPM) = (3) ² = (3)(3) = (9)(Head) |
| BHP | Cube | Double RPM = (2)(RPM) = (2) ³ = (2)(2) (2) = (8)(BHP) Triple RPM = (3)(RPM) = (3) ³ = (3)(3)(3) = (27)(BHP) |

| Change of Impeller Diameter (Dia.) | | |
|------------------------------------|-------------|--|
| | How Varies: | Examples |
| GPM | Directly | Double Dia. = (2)(Dia.) = (2)(GPM) Triple Dia. = (3)(Dia.) = (3)(RPM) |
| Head | Square | Double Dia. = (2)(Dia.) = (2) ² = (2)(2) = (4)(Head) Triple Dia. = (3)(Dia.) = (3) ² = (3)(3) = (9)(Head) |
| BHP | Cube | Double Dia. = (2)(Dia.) = (2) ³ = (2)(2) (2) = (8)(BHP) Triple Dia. = (3)(Dia.) = (3) ³ = (3)(3)(3) = (27)(BHP) |

Pump 56FB • Bronze • JM Frame • 2900 RPM

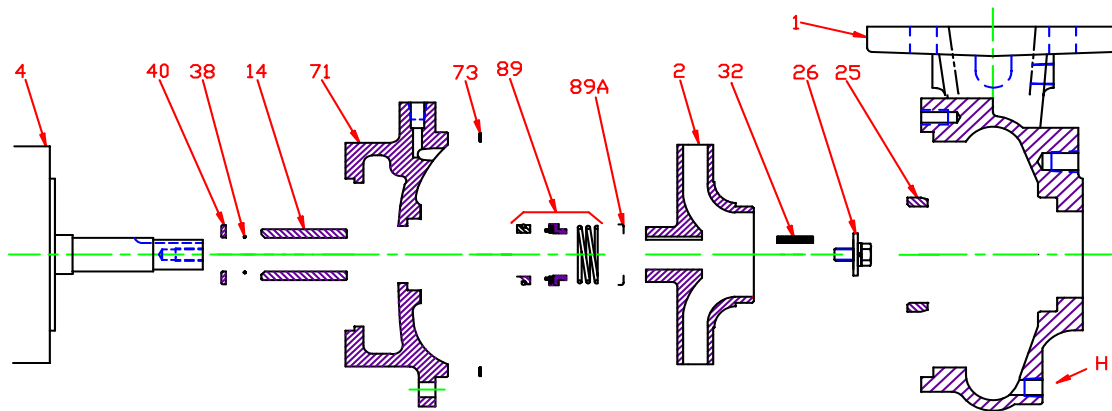

OBSOLETE

Does not meet DOE requirements


| KEY NO. | PART NAME | PUMP NO. 56FB | |
|---------|--|---|---|
| | | 7.5 - 15 HP | 20 - 30 HP |
| 1+ | CASE, BRONZE, 3 x 3 FLG | 130.000.237X | 130.000.237X |
| 2 | IMPELLER, ENCLOSED, SPECIFY DIAMETER: BRONZE | 7/8" KEYED 137.000.108 | 1 1/4" KEYED 137.000.109 |
| 4 | MOTOR, JM140/180 MOTOR, JM210 MOTOR, JM250 MOTOR, JM280/320 | See 60Hz Chart See 60Hz Chart -- -- | -- -- See 60Hz Chart See 60Hz Chart |
| 14* | SHAFT SLEEVE, BRONZE SHAFT SLEEVE, STAINLESS | 110.000.178 110.000.192 | 110.000.248 110.000.261 |
| 25 | WEAR RING, BRONZE | 103.000.138 | 103.000.138 |
| 26* | IMPELLER RETAINER, STAINLESS | 118.000.163A | 118.000.234 |
| 32* | KEY, STAINLESS | 102.000.102 | 102.000.208 |
| 38* | O-RING, SHAFT, BUNA O-RING, SHAFT, VITON | 116.000.117 116.000.105 | 116.000.218 116.000.218A |
| 40* | FLINGER, STAINLESS | 104.000.165 | 104.000.200 |
| 71 | ADAPTER, BRONZE - JM140/180 ADAPTER, BRONZE - JM210 ADAPTER, BRONZE - JM250 ADAPTER, BRONZE - JM280/320 | 132.000.228X 132.000.223X -- -- | -- -- 132.000.260X 132.000.259X |
| 73* | GASKET, CASE, FIBER | 116.000.157 | 116.000.157 |
| 89* | SEALS: BN-CARB/CM VN-CARB/CM VN-CARB/SIL VN-SIL/SIL EPDM-CARB/SIL EPDM-SIL/SIL | 1 1/2" 101.000.168 101.000.191 101.000.175 101.000.204 101.000.175B 101.000.204A | 1 3/4" 101.000.196 101.000.216 101.000.221 101.000.231 101.000.196B 137.001.555 |
| 89A* | SEAL RETAINER, STIANLESS | 104.000.174 | <i>Included w/seal</i> |
| -- | ° REPAIR KITS: BN-CARB/CM SEAL VN-CARB/CM SEAL (S) VN-CARB/CM SEAL VN-CARB/SIL SEAL VN-SILSIL SEAL (S) EPDM-CARB/SIL SEAL EPDM-SIL/SIL SEAL | 118.000.344 118.000.344A 118.000.344K 118.000.344B 118.000.344F 118.000.344C 118.000.344D | 118.000.345 118.000.345A 118.000.345E 118.000.345B 118.000.345C 118.000.345F 118.000.345G |

* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.

+ INCLUDES BRONZE WEAR RING.

° ALL REPAIR KITS INCLUDE THE BRONZE SHAFT SLEEVE EXCEPT THE (S) INDICATED, WHICH IS STAINLESS WITH VITON SHAFT O-RING.

Pump 56FB • Bronze • JM Frame • 2900 RPM

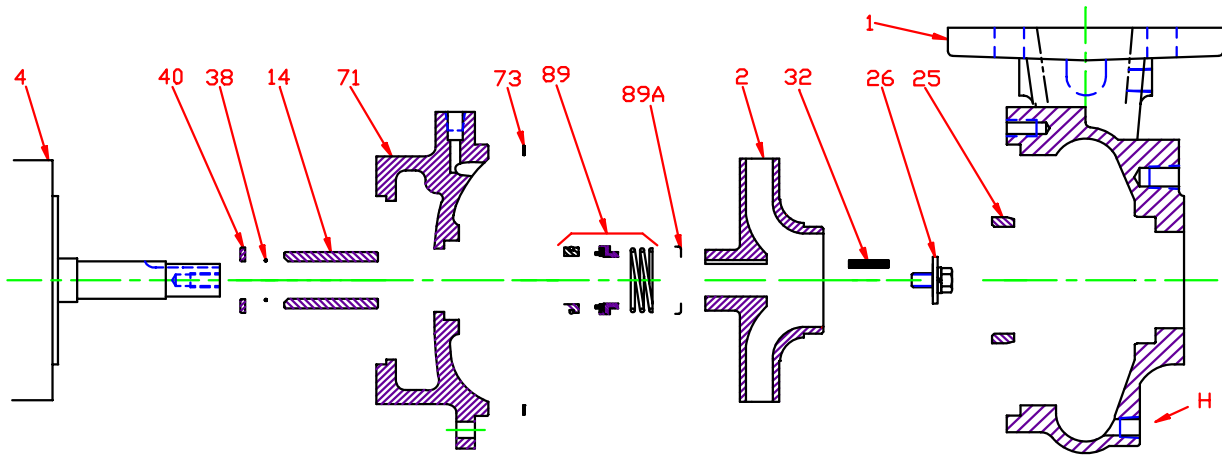

OBsolete

Does not meet DOE requirements

| CONSTRUCTION OPTIONS | | |
|----------------------|--------------------------------|------------|
| KEY | PART NAME | ALL BRONZE |
| 1 | Case | Bronze |
| 2 | Impeller | Bronze |
| 14 | Shaft Sleeve | Bronze |
| 25 | Wear Ring | Bronze |
| 26 | Impeller Retaining Assy | Stainless |
| 32 | Key | Stainless |
| 38 | Shaft O-Ring | BUNA |
| 40 | Flinger | Stainless |
| 71 | Adapter | Bronze |
| 73 | Gasket, Case | Fiber |
| 89 | Mechanical Seal, Type 21 BN-CM | Standard |
| 89A | Seal Spring Retainer | Stainless |
| H | Plug, Drain | Brass |

E054FJM

D11

C056FB2900JM