



Förderschneckenpumpe / Screw Pump /
 Pompe à hélice transporteuse
F 520 S

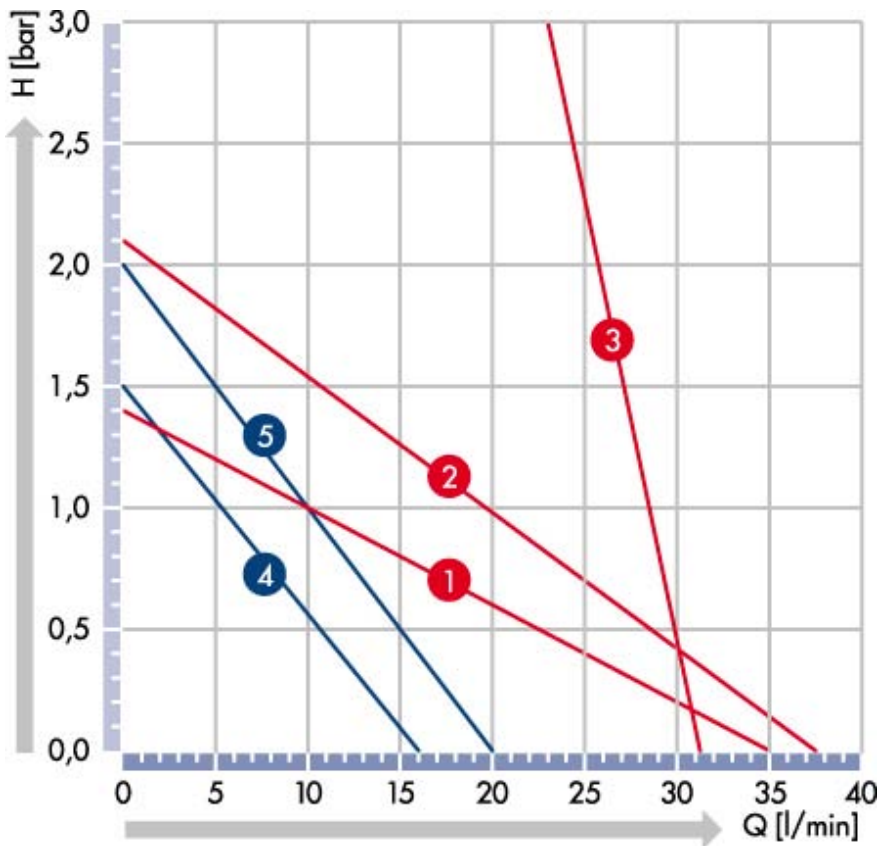

Motorleistung in kW
 Capacity of motor in kW
 Capacité du moteur en kW

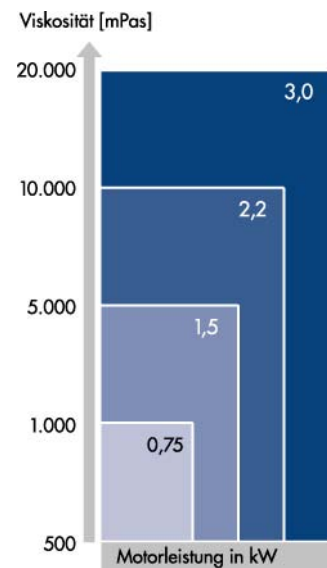

Messwerte / Values / Valeurs $\pm 10\%$
 gemessen mit Wasser bei 20°C am Druckstutzen der Pumpe
 obtained with water at 20°C at the outlet nozzle of the pump
 mesurées avec de l'eau à 20°C au refoulement de la pompe

Leistungskurve Nr. Performance Chart No. Courbe de performance No.	Typ / Type	Viskosität mPas (cP) Viscosity mPas (cP) Viscosité mPas (cP)
1	F 520 S-50/45	1.200
2		2.500
3		20.000
4	F 520 S-41/37	600
5		2.000