

Magnet drive gear pumps PG300 series



Find out more

There are applications where the liquids involved are very difficult to handle and working solutions are hard to find and require a great financial investment.

The PG300 series is Fluid-o-Tech's reply to such requirements. Made to give the same high level of performance as the MG300 series, the PG300 series pumps are built in a special grade of PPS to offer the greatest versatility and quality of material while allowing for exceptional mechanical characteristics.

The gears are available in Peek and PTFE.

The elastomers are available in a comprehensive range of materials to allow usage in the widest variety of applications.

The PG300 series offers mag drive coupling with ferrite or rare earths magnets.

Available upon request:

- Built-in relief valve
- Rare earths driven magnet



MAIN APPLICATIONS


- Medical and surgical equipment
- Hemodialysis apparatus
- Laser apparatus
- Lubrication
- Ink-Jet printing systems
- Cooling systems
- Laboratory instrumentation
- Water treatment
- Sampling
- Food processing equipment











TECHNICAL INFORMATION

Pump housing material	PPS	Max static pressure	20 bar/290 psi
Gears and bushing materials	Peek™/PTFE™	Temperature range	-45 to 60 °C/-49 to 140 F
Ports	1/8" GAS or NPT	Max vacuum	724 mmHg/28.5 inHg
Pump weight (PG317)	230 g (0.7 lbs)	Wet lift with water*	~ 8m/26.2 ft
Speed limit	5.000 rpm	Max instantaneous gradient of fluid	45°C/113°F

* Priming ability varies with operating conditions and fluid characteristics








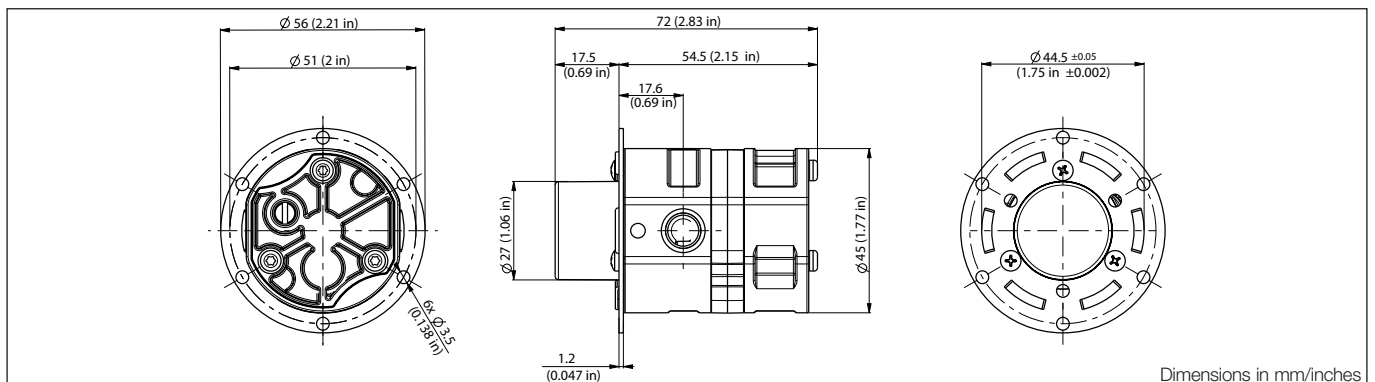


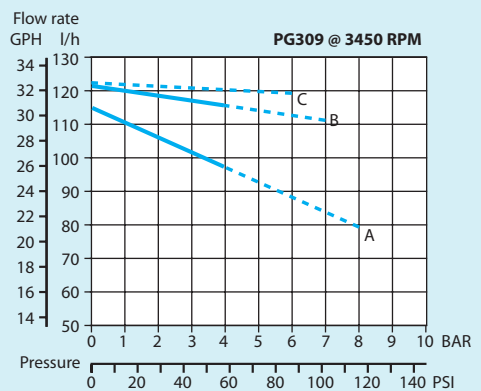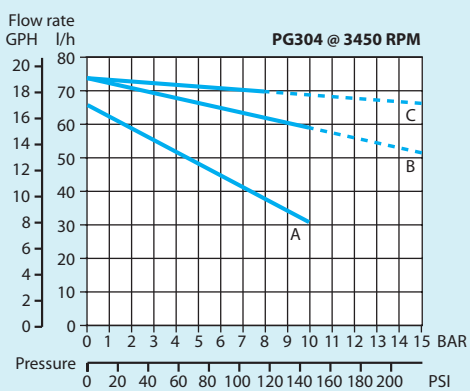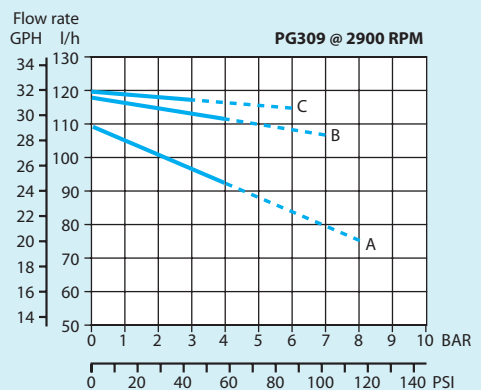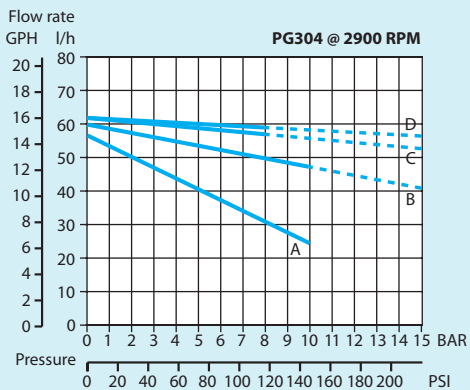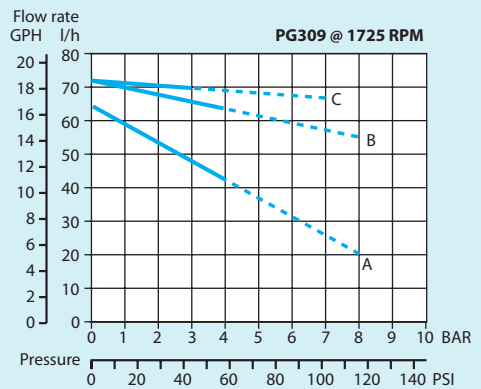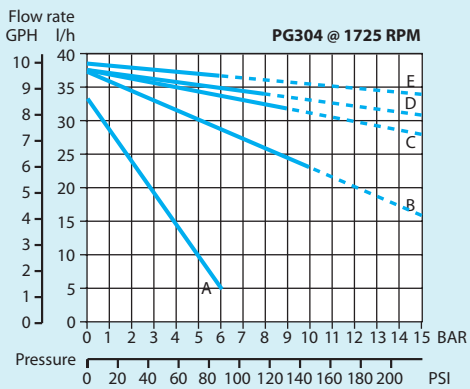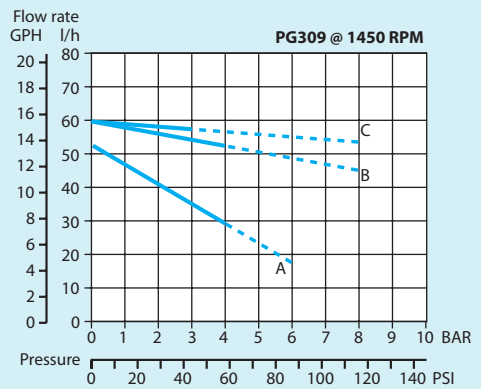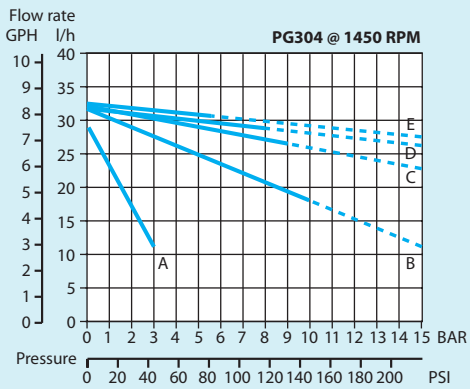

— Operating range with ferrite driving magnet
 - - - Operating range with rare earth driving magnet

A = 1 cSt B = 20 cSt C = 75 cSt D = 180 cSt E = 210 cSt

Note: Characteristics with water at 20 °C (68 F) and without relief valve. Use filter before pump inlet not larger than 10 micron. Temperature requirements different from ambient temperature must be mentioned on the order. Different materials available upon request.

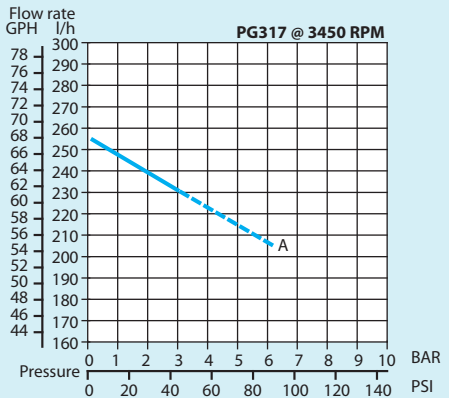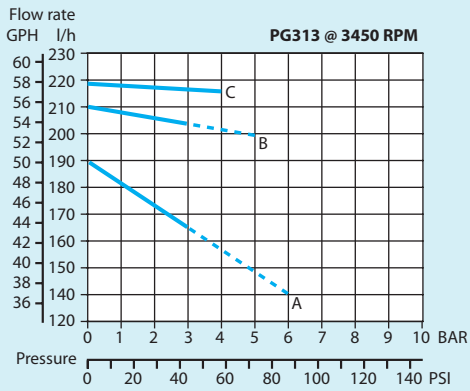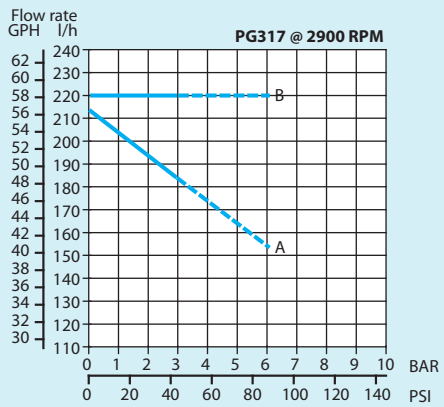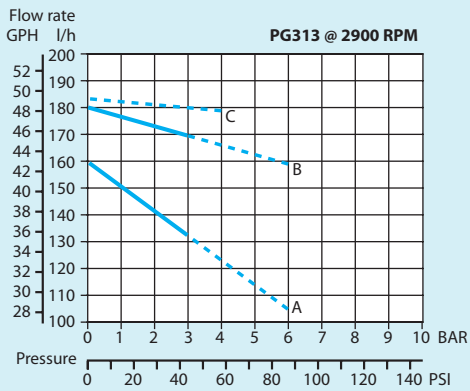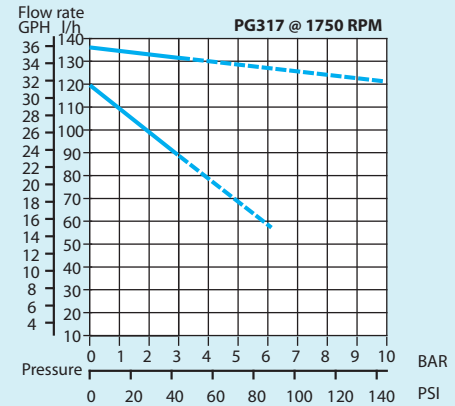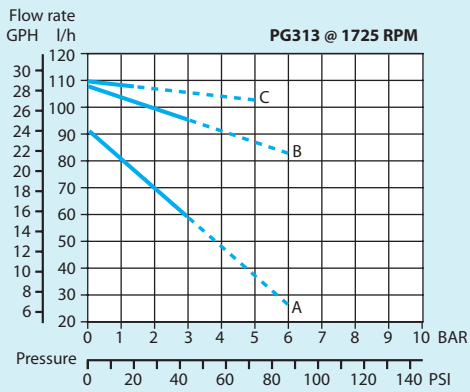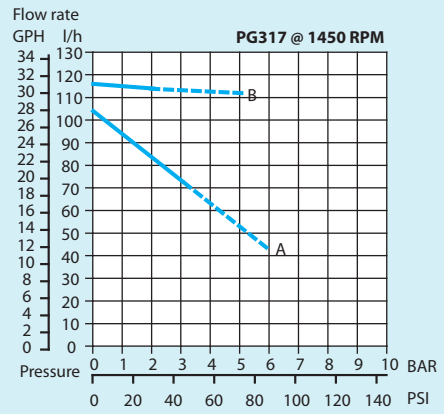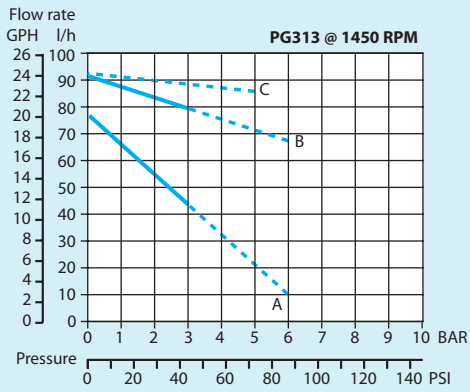

— Operating range with ferrite driving magnet
 - - - Operating range with rare earth driving magnet

A = 1 cSt B = 20 cSt C = 75 cSt D = 180 cSt E = 210 cSt

Note: Characteristics with water at 20 °C (68 F) and without relief valve. Use filter before pump inlet not larger than 10 micron. Temperature requirements different from ambient temperature must be mentioned on the order. Different materials available upon request.

MODEL NUMBER MATRIX

Position	1	2	3	4	5	6	7	8	Customization
Code	PG	3	09	R	D	0	P	E	00000

POS	DESCRIPTION	CODE	POS	DESCRIPTION	CODE
1	Driven magnet	PG = ferrite PS = rare earths	4	Housing material	R = PPS
2	Pump series	3 = with o-ring	5	Type of connections	D = 1/8" NPT G = 1/8" GAS
3	Gear width in mm (Nominal displacement)	04 = 4 mm (0.3 ml/rev)	6	Relief valve	0 = without 1 = with
		09 = 9 mm (0.6 ml/rev)	7	Gear material	P = Peek™ T = PTFE™
		13 = 13 mm (0.9 ml/rev)	8	Static seal material	E = EPDM N = NBR
		17 = 17 mm (1.2 ml/rev)			V = Viton S = Silicon

Fluid-o-Tech reserves the right to alter the specifications indicated in this catalogue at any time and without prior notice.

Fluid-o-Tech srl
Via Leonardo da Vinci, 40
20094 Corsico, Milano, Italy
Tel. +39 02 999501
Fax +39 02 99950999
info@fluidotech.it

Fluid-o-Tech Int'l Inc.
161 Atwater St.,
06479 Plantsville CT (USA)
Tel. +1 (860) 276-9270
Fax +1 (860) 620-0193
info@fluid-o-tech.com

Fluid-o-Tech Int'l Inc. Japan
203, 2-17-19, Ebara, Shinagawa
Tokyo 142-0063, Japan
Tel. +81 (0) (3) 3783-9660
Fax +81 (0) (3) 3783-9661
k.kato@fluidotech.com

Fluid-o-Tech Asia (Beijing) Co., Ltd
Jingwei Industrial Zone,
Beifang Huairou, Beijing, 101400, PRC
Tel. +86 (0) (10) 61684650
Fax +86 (0) (10) 61684651
info@fluidotech-asia.com