



Guzzler® Hand Pump GH-0400D



- Durable, lightweight Delrin® plastic
- Accommodates 1/2" - 1-1/4" hose
- 10 GPM
- Rugged aluminum handle
- Clamp ring adjusts to 12 different handle orientations
- Available with horizontal or vertical handle
- Optional aluminum clamp ring for added durability

Specifications / Options

Body & Ports *	Delrin / Gray
Clamp Ring	Delrin, Epoxy-coated Aluminum, Epoxy-coated Aluminum with Stop Brackets
Handle	Aluminum: Horizontal/Silver, Horizontal/Black, Vertical (Removable)/Silver
Valves *	Flapper, Duckbill, Umbrella
Diaphragm *	Buna-N, Buna-N Double Sided, Neoprene, Viton, EPDM, Silicone
Clevis/Button Assembly *	Delrin, SS Washer + Aluminum Clevis, All Stainless Steel
Internal Spring *	None, Lightweight, Standard, Heavy-Duty (all stainless steel)
Other	Thru-Deck Mounting Kit (for vertical handle only)

* In contact with fluid

Additional Optional Clamp Rings



Epoxy-coated Aluminum for reinforcement against vigorous pumping



Epoxy-coated Aluminum with Stop Brackets to prevent over-stroking

Performance

Flow Rate	Per minute ¹ : 10 Gal (37.9L) Per stroke: 0.44 Qt (0.42L)
Max Lift	12 ft (3.7 m) 22 ft (6.7 m) with check valve
Max Head	30 ft (9.1 m)
Max Pressure²	15 psi (1.0 kg/cm ²)
Max Service Temp	150°F (66°C)

¹: at 90 cpm
²: 20 psi with 19 in handle

Available Ports

	in	1/2	3/4	1	1-1/8	1-1/4
	cm	1.27	1.91	2.54	2.86	3.18
Hose (Smooth)			•	S	•	•
NPT Female (Tapped)		•	•			
NPT Male (Threaded)			•			
Male Garden Hose (Threaded)			•			
Barbed			•		•	
Female Garden Hose Adapter			•			

S Standard • Optional

Valve Options



Flapper — General purpose liquid transfer.




Duckbill — For dirty liquid and sewage. Permits mounting in any position.




Umbrella — Most efficient for pumping clean liquid. Also used for air and vacuum service.

Optional Extra-Long Handle

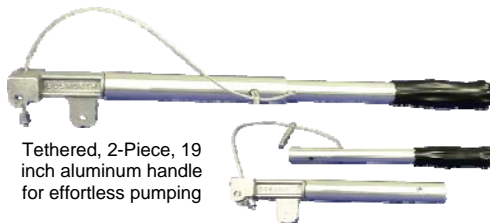


Tethered, 2-Piece, 19 inch aluminum handle for effortless pumping

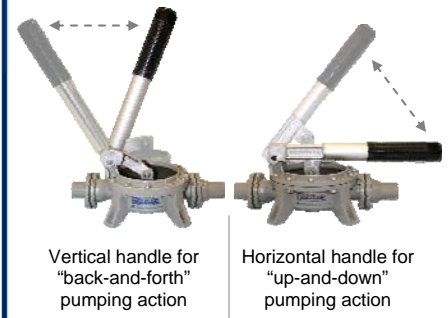

Vertical handle for "back-and-forth" pumping action

Horizontal handle for "up-and-down" pumping action

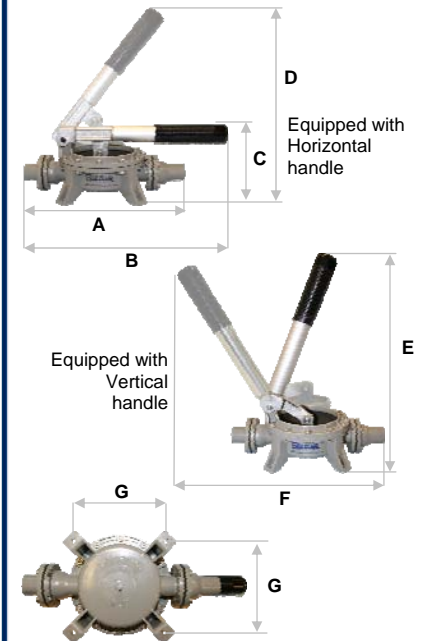

	in	cm
A	10-1/4	26.0
B	12-3/4	32.4
C	4-5/16	11.0
D	12	30.5
E	13-5/16	33.8
F	12-3/4	32.4
G	4-5/16	11.0
Mounting Holes	1/4	0.64
Bolt Circle Diam.	6-1/8	15.6
Weight (w/Horiz. Hndl.)	1.70 lb	0.77 kg
Weight (w/Vert. Hndl.)	1.75 lb	0.79 kg

Guzzler® Hand Pump GH-0400D



Example: GH-0400D-111-10-5050-00

- Guzzler Hand Pump
- Model style #0400D: Delrin Body, Opposite Side Ports
- Horizontal Handle (Silver)
- Buna-N Flapper Valves
- Buna Diaphragm
- Delrin Plastic Clevis/Button Assembly
- Delrin Plastic Clamp Ring
- Inlet: 1" Smooth
- Outlet: 1" Smooth
- No Spring

Guzzler Product	
Option	Code
Hand Pump	GH

Style (Family)	
Option	Code
Delrin, Opp. Side Ports	0400D

Handle	
Option	Code
Horizontal/Silver	1
Horizontal/Black	2
Vertical/Silver (Removable)	4
Horizontal/19"/2-Piece/Tethered	5

Valves	
Option	Code
Flapper (Buna-N)	1
Flapper (White Buna)	2
Flapper (Neoprene)	3
Flapper (Viton)	4
Flapper (EPDM)	5
Duckbill (Buna-N)	6
Umbrella (Silicone)	7

Diaphragm	
Option	Code
Buna Nitrile	1
Buna-N 3-Ply	2
Neoprene	3
Viton	4
EPDM	5
Silicone	7

GH - 0400D - 1 1 1 - 1 0 - 50 50 - 00

Clevis/Button Assembly	
Option	Code
Delrin Plastic	1
Stainless Steel	3
SS Washer & Alum Clevis	4

Clamp Ring	
Option	Code
Delrin Plastic	0
Epoxy-coated Alum	1
Epoxy-coated Alum w/Stop Brackets	4

Hose Connections		
Option	Code	
	Inlet	Outlet
1/2" NPT Tapped	31	31
3/4" Smooth	40	40
3/4" NPT Tapped	41	41
3/4" NPT Threaded	42	42
3/4" Barbed	43	43
3/4" Female GH Adapter	45	45
3/4" Male Garden Hose	46	46
1" Smooth	50	50
1" NPT Threaded	52	52
1-1/8" Smooth	60	60
1-1/8" Barbed	63	63
1-1/4" Smooth	70	70

Internal Spring	
Option	Code
No Spring	00
Std Weight SS	10
Lightweight SS	20
Heavy Duty SS	30

